



NF520T-C33 (MS-7615 v1.0) ATX Mainboard

Supports AMD® Phenom II/ Phenom/ Athlon II/ Athlon/ Sempron processors in AM3/ AM2+/ AM2 package

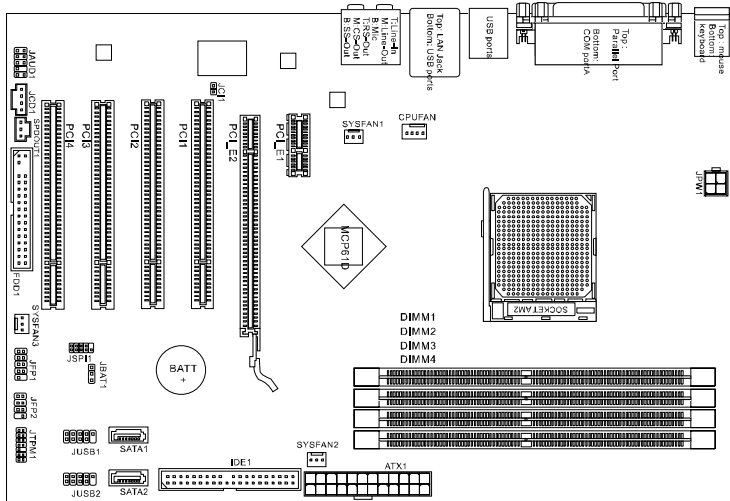

Mainboard Specification

Processor Support

- Supports AMD® Phenom II/ Phenom/ Athlon II/ Athlon/ Sempron processors in AM3/ AM2+/ AM2 package
- Supports up to 6000+ and higher CPU

Supported FSB

- Hyper Transport support speed up to 1GHz

Chipset

- Nvidia® MCP61D/MCP61P chipset

Memory Support

- DDR2 533/667/800/1066/1200+ (OC) SDRAM (16GB Max)
- 4 DDR2 DIMMs (240pin / 1.8V)

LAN

- Supports 10/100 LAN Fast Ethernet by Realtek® RTL8201EL

Audio

- HD ALC888S-VC2
- Flexible 8-channel audio with jack sensing
- Compliant with Azalia 1.0 Spec

IDE

- 1 IDE port by MCP61D
- Supports Ultra DMA66/100/133 mode

SATA

- 2 SATA II ports by MCP61D
- Supports storage and data transfers at up to 3 Gb/s

Floppy

- 1 floppy port
- Supports 1 FDD with 360KB, 720KB, 1.2MB, 1.44MB and 2.88MB

Connectors

- Back panel
 - 1 PS/2 mouse port
 - 1 PS/2 keyboard port
 - 1 serial port (COM1)
 - 1 parallel port supporting SPP/EPP/ECP mode
 - 4 USB 2.0 ports
 - 1 LAN jack (10/100/1000)
 - 6 flexible audio jacks
- On-Board Pinheaders/ Connectors
 - 2 USB 2.0 pinheaders
 - 1 Chassis Intrusion Switch pinheader
 - 1 Serial port connector
 - 1 CD-In connector
 - 1 Front Panel Audio pinheader
 - 1 TPM Module pinheader
 - 1 SPDIF-Out connector

Slots

- 1 PCI Express x16 slot
- 1 PCI Express x1 slot
- 4 PCI slot
- Support 3.3V/ 5V PCI bus Interface

Form Factor

- ATX (30.5cm X 20.5 cm)

Mounting

- 6 mounting holes